



Measurements of Some Meteorological Variables at a Tropical Location in Nigeria

Omodara E. Obisesan ^{a*}

^a Department of Physics, Anchor University, Lagos, Nigeria.

Author's contribution

The sole author designed, analyzed, interpreted and prepared the manuscript.

Article Information

DOI: 10.9734/AIR/2022/v23i430340

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/89224>

Original Research Article

Received 08 May 2022
Accepted 12 July 2022
Published 23 July 2022

ABSTRACT

This study observed six meteorological variables at a tropical location from 2016 to 2019. The measurement was performed at the meteorological station (7.55 °N; 4.56 °E) of Obafemi Awolowo University, Ile-Ife, Nigeria. The variables that were measured are: incoming solar radiation, net radiation, air temperature, surface temperature, relative humidity and wind speed. The results obtained showed that the maximum daytime monthly mean values of the incoming solar radiation (S) and net radiation (Rn) were recorded in March (782.0 and 545.4 Wm⁻², respectively), which is the transition month from dry to wet season. The minimum daytime monthly mean values of S and Rn were recorded in August (443.9 and 330.4 Wm⁻², respectively) which is the cloudiest month of the year at the study location. The daily air and surface temperatures (Ta and Ts, respectively) varied between 16.4 and 37.8 °C; 17.7 and 49.7 °C, respectively. The daytime maximum values peaked at about 15:00 LT with the maximum monthly mean values recorded in February (36.3 and 47.7 °C, respectively) and the daytime minimum monthly mean values recorded in August (28.9 and 33.3 °C, respectively). The daily values of relative humidity (Rh) ranged between 29 % and 98 % with a mean value of 47 %. The diurnal trend of wind speed (u) recorded at the study location ranged between 0.48 ms⁻¹ to 2.10 ms⁻¹.

Keywords: Measurements; solar radiation; net radiation; air temperature; surface temperature; relative humidity; wind speed.

1. INTRODUCTION

Meteorological variables are indispensable in the development of geographical climatology, agricultural meteorology and in the interpretation of physical processes in the lower atmosphere. They are essential for the monitoring and prediction of weather and climate; and for the management of natural resources. These observations are important for the short term decision of activities such as monitoring of natural disaster, farming response, early warning of pests and diseases, etc. Meteorological variables are also imperative in the long term prediction of weather forecast [1]. Knowledge of meteorology is the basis of scientific weather forecast which is the prediction of the state of the atmosphere at a given location. This helps in the determination of the physical and chemical characteristics of the atmosphere. Therefore, standard and high quality observations of climatic variables are fundamental necessity [2]. Meteorological variables are usually measured in meteorological stations. A meteorological station is a collection of different instruments or sensors for the measurements of different meteorological variables such as temperature, solar radiation, precipitation, humidity, wind speed, atmospheric pressure, rainfall, etc. The instruments used for the collection of the variables depend on the weather condition of a particular location. A meteorological station can either be analog (where the weather data are physically collected and recorded by humans) or digital [3].

Mean meteorological variables are often called routinely-measured meteorological variables because they are easily and commonly measured. Hence, they are readily available for the immediate weather or climatic determination of local and regional atmosphere. In this study, six meteorological variables were routinely measured at the meteorological station located at the Teaching and Research Farm of Obafemi Awolowo University, Ile-Ife, Nigeria. The variables are solar radiation, net radiation, air temperature, surface temperature, relative humidity and wind speed. These variables are consistently used for the monitoring of the weather, farming response and description of the atmosphere at the study location.

1.1 Radiation

Solar radiation is the direct radiation received at the earth's surface. It determines the energy available at the surface for physical and

biological processes [4]. Net radiation is the algebraic sum of incoming and outgoing solar and terrestrial radiation [5]. The measured radiation (solar and net radiation) is dependent on season, surface temperature, geographical location, time of the day, cloudiness, type and conditions of the surface as indicated by albedo and emissivity [6]. Observation of radiation is applicable in the study of land-surface processes, simulation of crop growth models, solar voltaic technology, solar electrical applications, among others [7]. Solar radiation can be measured using a pyrheliometer or a pyranometer while net radiation can be measured with a net radiometer.

1.2 Temperature

Temperature is the thermodynamic state of a body. It describes the mean random motion of molecules in a physical body. Air temperature is a measure of the heat content in the atmosphere as a result of the combined effects of absorbed solar radiation by the surface, convection of air by the vertical fluxes of turbulent heat and horizontal advection of warm and cold air masses [8]. Increase in air temperature leads to increase in the rate of heat transfer at the surface which consequently results in higher evaporation rates. In sunny conditions, the maximum air temperature is usually observed between 12:00 and 14:00 hr, while the minimum air temperature is obtained between 04:00 and 06:00 hr. The time required for air to rise from the minimum temperature to the maximum temperature is usually less than 10 hr, but the time requirement for air at the maximum temperature to reach the minimum temperature is more than 14 hr.

Surface temperature is the skin temperature of the earth's surface [9]. It describes processes such as the rate and timing of plant growth, the exchange of energy and water between the earth's surface and atmosphere. Surface temperature is sensitive to soil moisture and vegetation, therefore, it can be used for the identification of land use/land cover changes. Surface temperature can also be used in the estimation of radiation budgets and as a control for climate models [10].

Temperature can be measured at various levels: near the earth's surface, at the upper atmosphere, at the ground surface, surface levels of sea and lakes and various depths of the soil. Instruments for measuring temperature are: thermistors, thermocouples, platinum resistors,

liquid-in-glass thermometers, sonic and radiometric sensors.

1.3 Relative Humidity

The relative humidity in a location, is the ratio of vapour pressure observed to the saturation vapour pressure at the same temperature and pressure, in percentage [11]. It is a percentage of the total amount of moisture that air can hold. A relative humidity of 50 % signifies that the air is half saturated with moisture. The significance of relative humidity to a particular application depends on the knowledge of both the dry-bulb temperature and the relative humidity. The humidity of air in cool temperate regions varies between 45 and 55 %, while in tropical regions, a value as high as 80 % can be obtained. Measurements of relative humidity can be applied in environmental studies, aeronautical services, agriculture, hydrology and climatic studies. Relative humidity can be measured with a psychrometer. A psychrometer is a device that contains two thermometers, each for the measurement of dry air and moist air [12].

1.4 Wind Speed

Wind is caused by the uneven heating of the surface by the incoming solar radiation. Wind speed is the small-scale random fluctuations of air in space and time. Wind measurements are required for the determination of wind energy, estimation of wind damage, estimation of surface fluxes, monitoring and forecasting of weather. Wind speed can be measured using a wind gauge or anemometer.

Despite the relatively simple instrumentation for the measurements of mean meteorological variables, the observational data is still scarce in West Africa. Although, the availability of satellite data has the potential to complement the paucity of these measurements, the data cannot provide the spatial or temporal resolution compared to in-situ sensors, especially for local weather-dependent activities. Therefore, this study presents the measurements of six meteorological variables at a tropical location in Ile-Ife, Nigeria.

2. METHODOLOGY

2.1 Site Description

The field measurement was conducted at Obafemi Awolowo University Meteorological

Station, Ile-Ife (7.53 °N; 4.54 °E), Nigeria, between 2016 and 2019. The climate of the area can be characterized by two seasons: the wet and the dry seasons. The dry season spans between November and February. March is a transition month from the dry to the wet season. The wet season is between April and October. The change of season is as a result of the meridional movement of the Inter-Tropical Discontinuity (ITD) which separates the dry and hot North-Easterly trade winds from the moist and warm South-Westerly trade winds at the surface [13]. The onset months of the wet season is within the weather zone B that extends from 200 - 400 km south of the surface position of the ITD. This zone can be described by its suppressed convection which results into the formation of cumulus clouds. Hence, precipitation is limited to light showers. At the peak of the wet season (July), the study area falls within the weather zone D and it is characterized by stratus cloud which is associated with light rains and drizzles with occasional thunderstorm activities [5].

2.2 Instrumentation

The sensors used for the measurements of the meteorological parameters in this study were mounted a 6-m meteorological mast. A wind cup anemometer (034B) was mounted at a height of 6 m to measure wind speed, a temperature and relative humidity probe (HMP45) was located at a height of 4 m for the measurement of air temperature and relative humidity. At a height of 2 m, a pyranometer (CS300) and a four-component net radiometer (NR01) were mounted for the measurements of incoming solar radiation and the components of net radiation, respectively. A 110PV-L temperature probe was placed on the surface to measure the surface temperature.

2.2.1 CS300 pyranometer

The CS300 pyranometer which comprises of a silicon photovoltaic detector mounted in a cosine-corrected head was used for the measurement of solar radiation. The CS300 was installed from all reflective surfaces and obstructions that might affect measurement. It has a spectral range of 360 - 1120 nm, measurement range of 0 – 2000 Wm⁻² and accuracy of ±5 % for daily total radiation. The operational temperature of CS300 is between -40 °C and +70 °C.

2.2.2 NR01 net radiometer

The net radiation was measured with the NR01 net radiometer (Campbell Scientific, Inc.). The sensor is a high-output thermopile which measures the algebraic sum of the incoming radiation (0.2 - 0.7 μm) and outgoing radiation (0.7 - 100 μm). The balance of both the shortwave and longwave radiation is known as the net radiation. The sensor is passive, hence, it requires no power supply. Its upward-facing side measures the incoming solar energy and far infrared radiation received from the whole hemisphere (180° field of view). Its downward-facing side measures the energy received from the surface. The values obtained from the two sides are subtracted and the outcome is interpreted as a single output signal. NR01 was designed for constant outside usage, it has a temperature range from about -30 °C to +70 °C and its sensitivity is 10 $\mu\text{VW}^{-1}\text{m}^2$. The surface of the sensor is spectrally black, hence, it absorbs radiation from all wavelengths. This enhances the stability of the sensor and its life time.

2.2.3 HMP45 air temperature/humidity probe

HMP45 Air Temperature/Humidity Probe was used for the measurement of air temperature and relative humidity. It comprises of a Platinum Resistance Temperature detector (PRT) and a Vaisala INTERCAP capacitive relative humidity sensor. It is a simple, durable, cost-effective and miniature-size humidity probe. The probe has a length of about 7.1 cm and a diameter of 1.2 cm. Its low power consumption of about < 2 mA makes it suitable for battery-powered applications. HMP45 has an operational temperature between -40 and +60 °C and it is designed to fit for rough conditions.

2.2.4 110PV-L surface temperature probe

A 110PV-L surface temperature probe was used to measure the surface temperature. The 110PV-L has a thermistor which is enclosed in an aluminum disk. The aluminum disk shields the thermistor and stimulates heat transfer from the surface. The probe measures temperature within the range of -40 and +135 °C.

2.2.5 034B wind cup anemometer

The horizontal wind speed was measured with a Campbell scientific 034B cup anemometer and was located away from obstructions such as trees. The rotation of the cup wheel opens and

closes a reed switch at a rate proportional to wind speed. The operating range was between 0 and 75 ms^{-1} with a threshold of 0.4 ms^{-1} . Its output signal is contact close (reed switch) and its resolution is 0.7998 ms^{-1} per scan rate in seconds. The cup has an accuracy of 0.1 ms^{-1} and an operating temperature of -30 to 70 °C.

2.3 Data Acquisition and Reduction

A Campbell Scientific datalogger system (CR10X) was employed for data acquisition during this experiment. All the sensors were connected directly to the datalogger through the SE or DIFF channels. The datalogger measured signals as voltages and stored them. The data was collected via a retrieval system (a serial cable connecting a computer with the datalogger). Sampling of the data was done every 10 seconds, saved as 1-minute averaged values and subsequently, the data was reduced to produce 30-minutes statistics. Microcal Origin 7.0 (data analysis software package) was used for graphing and analysis of the variations of the meteorological variables.

3. RESULTS AND DISCUSSION

3.1 Diurnal Variations of Incoming Solar Radiation and Net Radiation

The monthly hourly averaged values of incoming solar radiation (S) and net radiation (Rn) from January to December at the study location are presented in Fig. 1. From sunrise, the magnitudes of S increased steadily from zero to reach maxima at about the local noon (13:30 Local Time, LT) when there was maximum intensity of incoming solar radiation. From sun set (about 18:00 LT), the values of S dropped gradually to zero throughout the night.

At dawn, the magnitudes of Rn were negative and relatively constant. As the sun rises, the values became positive and reached maxima at about 13:30 LT when the sun was overhead. As the sun sets, the values of Rn reduced steadily to negative throughout the night. The negative values were within the range of -4.4 and -40.4 Wm^{-2} , indicating radiative cooling at the surface.

It was observed that the values of the solar radiation were about 36 % higher than that of the net radiation. This is due to the fact that solar radiation is mainly the direct energy received from the sun at the surface while net radiation is

the algebraic sum of incoming and outgoing solar and terrestrial radiation.

In Fig. 1, the maximum values of S (S_{max}) and R_n ($R_{n_{max}}$) in January were 664.5 and 389.7 Wm^{-2} , respectively. These values are relatively lower than the values obtained in February (672.6 and 418.5 Wm^{-2} , respectively) due to the highly turbid atmosphere since the dry season peaks around this period. S_{max} and $R_{n_{max}}$ increased considerably in March to 782.0 and 545.4 Wm^{-2} , correspondingly, as the highest values of radiation obtained in the study period. March is usually a transition month between the dry and wet season. The period is characterised with occasional rain showers which leads to washouts and significant reduction in atmospheric turbidity [14]. Consequently, there is less attenuation of the incoming solar radiation hence, the high values obtained.

At the start of the wet season in April, S_{max} and $R_{n_{max}}$ decreased from 710.9 and 507.7 Wm^{-2} , respectively, to 697.6 and 501.9 Wm^{-2} , respectively in May and continued to decrease through June and July till they reached the lowest values in August. In August, the lowest daytime maximum values of S and R_n were recorded as 443.9 and 330.4 Wm^{-2} , correspondingly. These values are attributed to cloudiness which is prevalent about this period. S_{max} and $R_{n_{max}}$ increased progressively from 562.1 and 417.3 Wm^{-2} , respectively in September to 740.5 and 510.8 Wm^{-2} , respectively in November as the wet season concluded and then dropped to 689.1 and 422.9 Wm^{-2} , respectively in December as the dry season kicked off again.

3.2 Diurnal Variations of Air Temperature and Surface Temperature

The monthly hourly averages of air temperature (T_a) and surface temperature (T_s) obtained for the same period of study are presented in Fig. 2. Generally, in the mornings (00:00 LT – 07:00 LT), the values of air and surface temperatures were low and fairly constant (in the range of 20 and 25 °C; 21 and 27 °C, respectively) due to the radiative cooling at the surface. The values of T_a and T_s steadily increased from about 07:30 LT reaching maxima (35 °C and 46 °C, respectively) at about 15:00 LT and 14:00 LT, respectively. The lag between the two variables was

significant in the dry months (January, February, March, November and December). That is, the surface temperature reached maxima faster than air temperature in the aforementioned months. This is as a result of high solar heating at the surface due to the intense incoming solar radiation that is prominent at this period. Consequently, the surface heats faster than the overlying air, leading to significant difference in the daytime values of T_a and T_s in the dry months unlike in the wet months.

As the surface gradually cooled from about 17:30 LT, the values of T_a and T_s steadily decreased to minimum (in the range of 21 and 22 °C and 22 to 28 °C, respectively) from 20:00 LT to 24:00 LT. The daily air and surface temperatures varied between 16.4 and 37.8 °C; 17.7 and 49.7 °C, respectively.

In January, the maximum values of T_a ($T_{a_{max}}$) and T_s ($T_{s_{max}}$) recorded were 35.8 °C and 45.6 °C, respectively. These high values were attributed to the intense solar heating at the earth's surface during this period. In February, $T_{a_{max}}$ increased to 36.3 °C and $T_{s_{max}}$ increased to 47.7 °C. These values are the highest values of temperature recorded during the study period. As the season transits from dry to wet in March, $T_{a_{max}}$ decreased to 35.7 °C and $T_{s_{max}}$ decreased to 42.4 °C.

As the wet season commences in April, the peak values of $T_{a_{max}}$ and $T_{s_{max}}$ gradually dropped to 34.2 °C and 38.3 °C, respectively. The values continued to decrease throughout May, June and July to reach the minimum of 28.9 °C and 33.3 °C, respectively in August.

The low values obtained in August are due to cloudiness, high moisture content in the atmosphere and low intensity of solar radiation as distinct features of the wet season. These characteristics are in agreement with the report of [14]. The air and surface are highly moist, therefore, the temperatures are of the lowest during this period. As the wet season recedes by October, the daytime values of $T_{a_{max}}$ and $T_{s_{max}}$ increased steadily from 32.6 °C and 36.7 °C; to 33.9 °C and 42.2 °C, respectively in November. Thereafter, $T_{a_{max}}$ and $T_{s_{max}}$ increased to 35.0 °C and 45.1 °C, respectively in December when the dry season was again re-established.

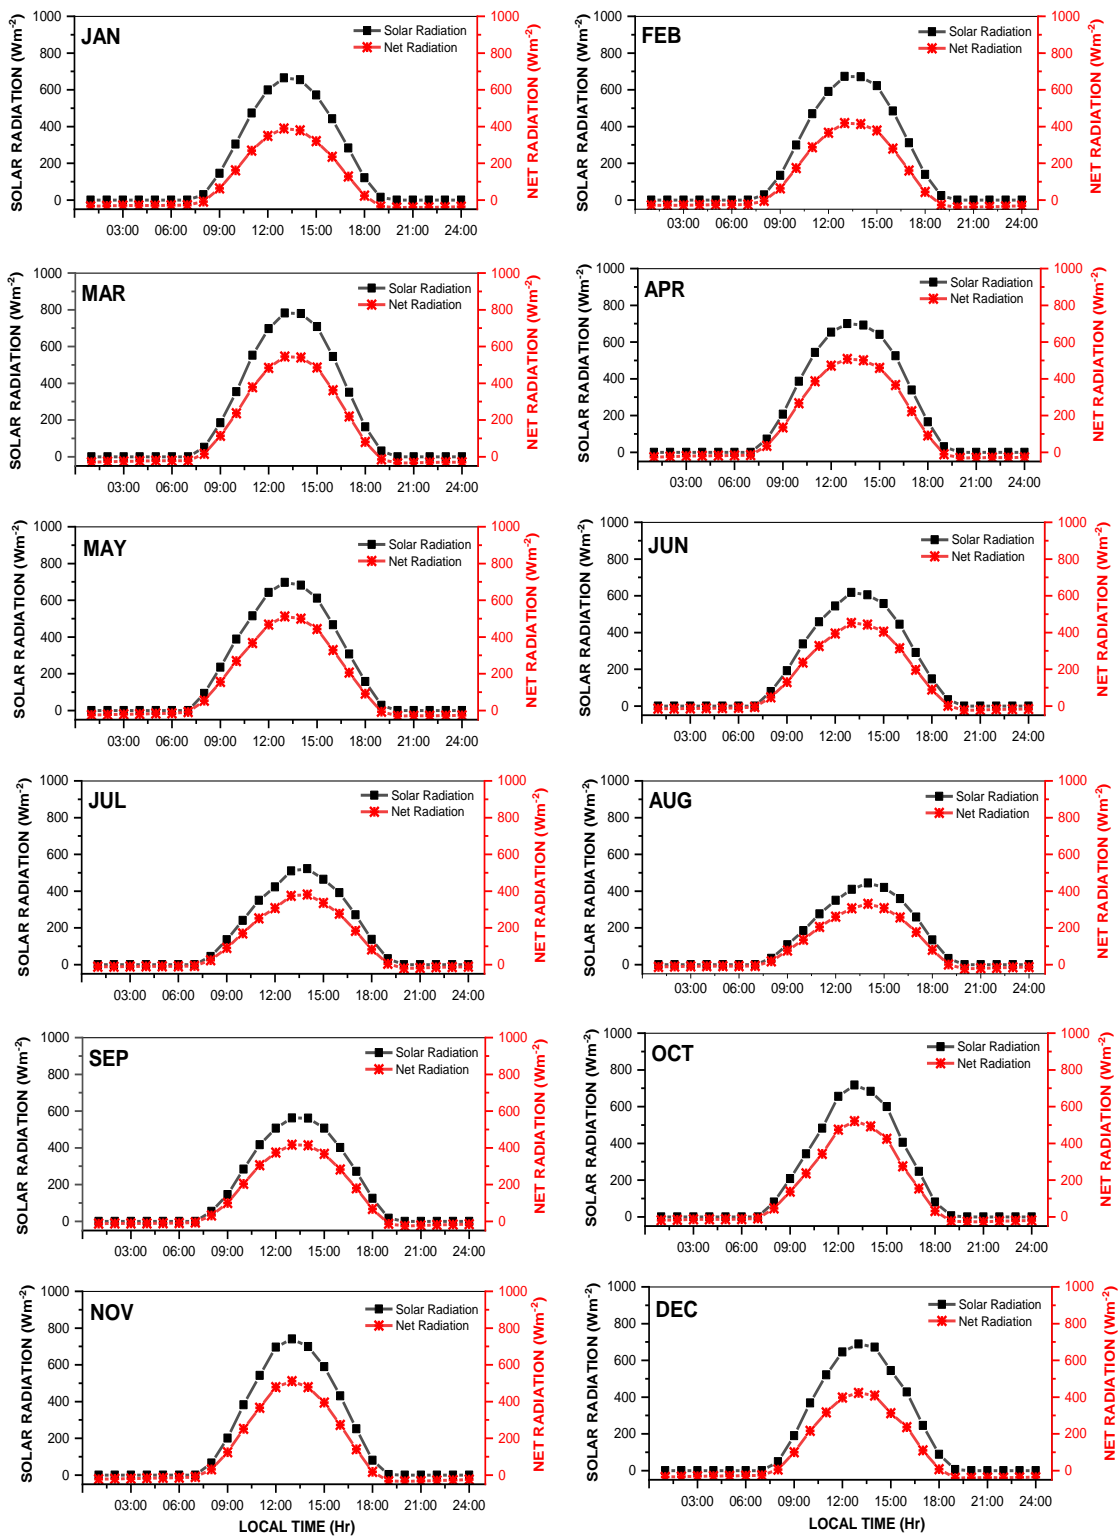


Fig. 1. Diurnal variations of monthly mean solar radiation and net radiation

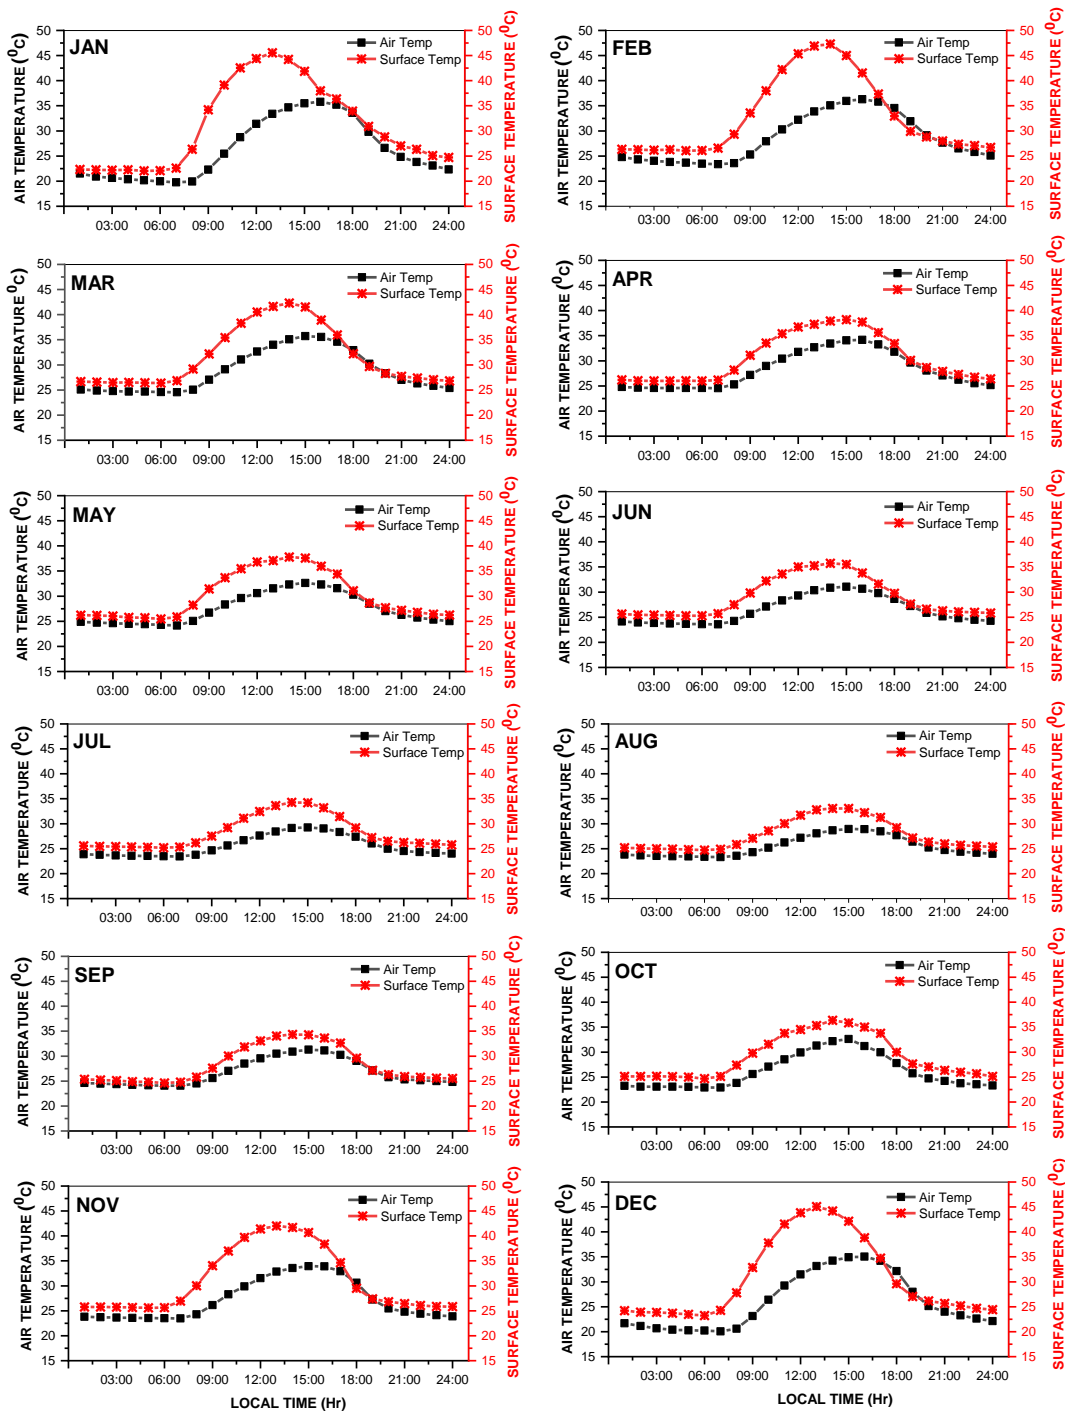


Fig. 2. Diurnal variations of monthly mean air temperature and surface temperature

3.3 Diurnal Variation of Relative Humidity

The monthly hourly averages of relative humidity (Rh) from January to December observed at the study location are presented in Fig. 3. Going by

the mean diurnal trend, from 00:00 LT to 08:30 LT, the values of Rh were high (> 80 %). The high values are indicative of the atmosphere being humid which consequently lead to condensation due to radiative cooling. From

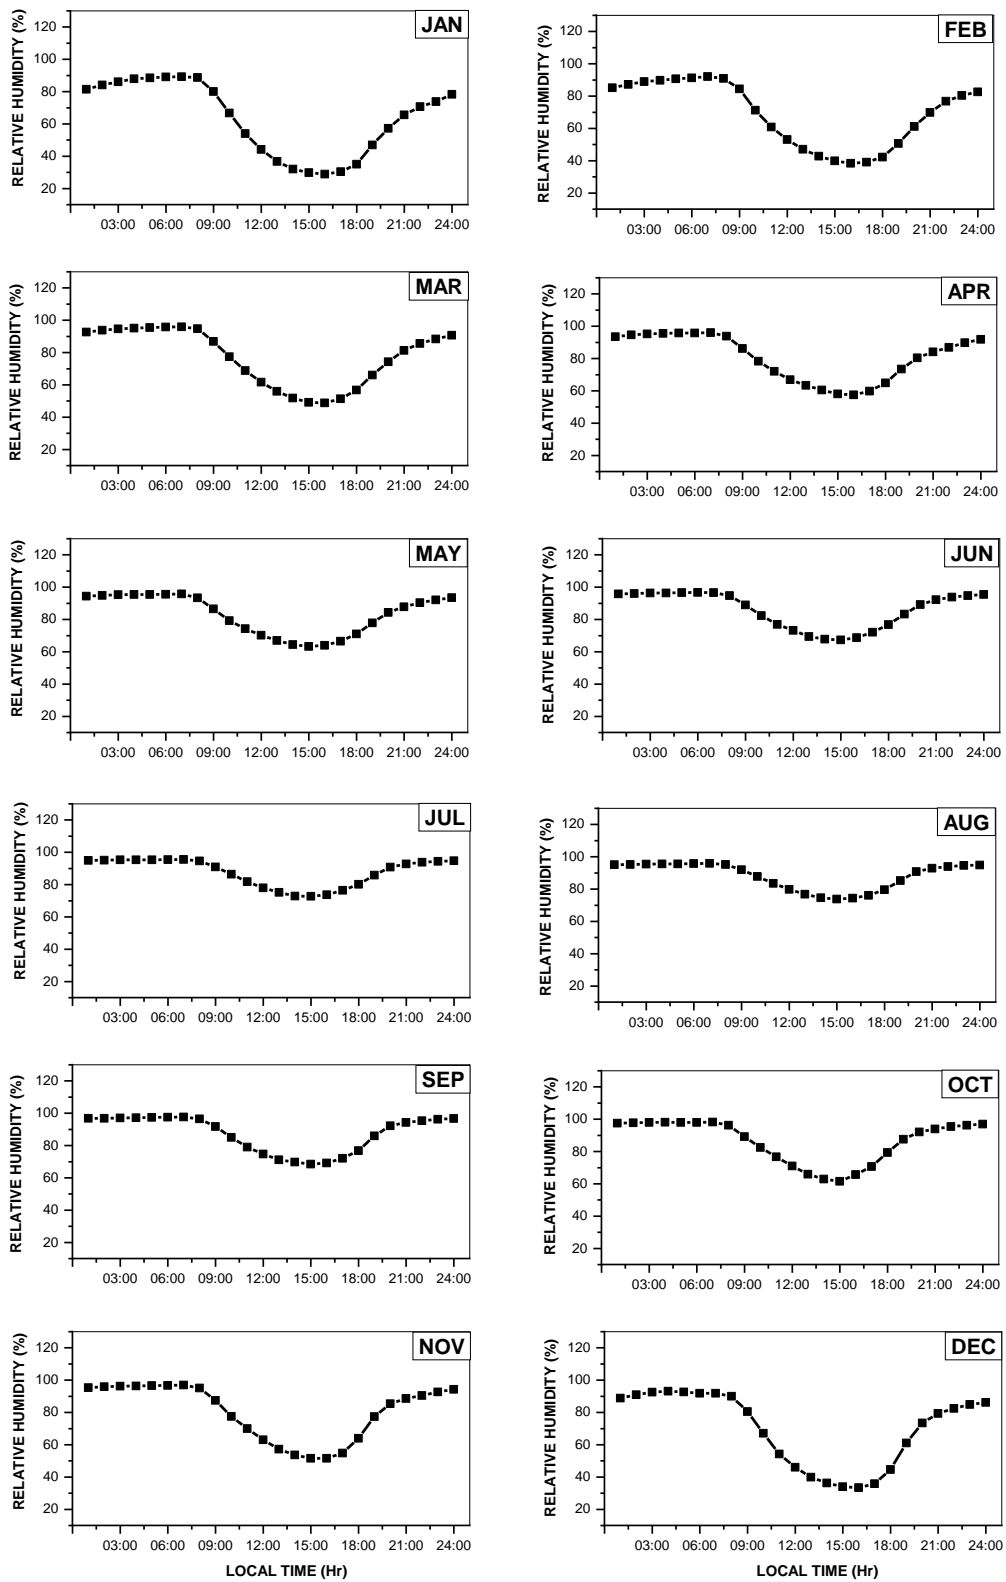


Fig. 3. Diurnal variation of monthly mean relative humidity

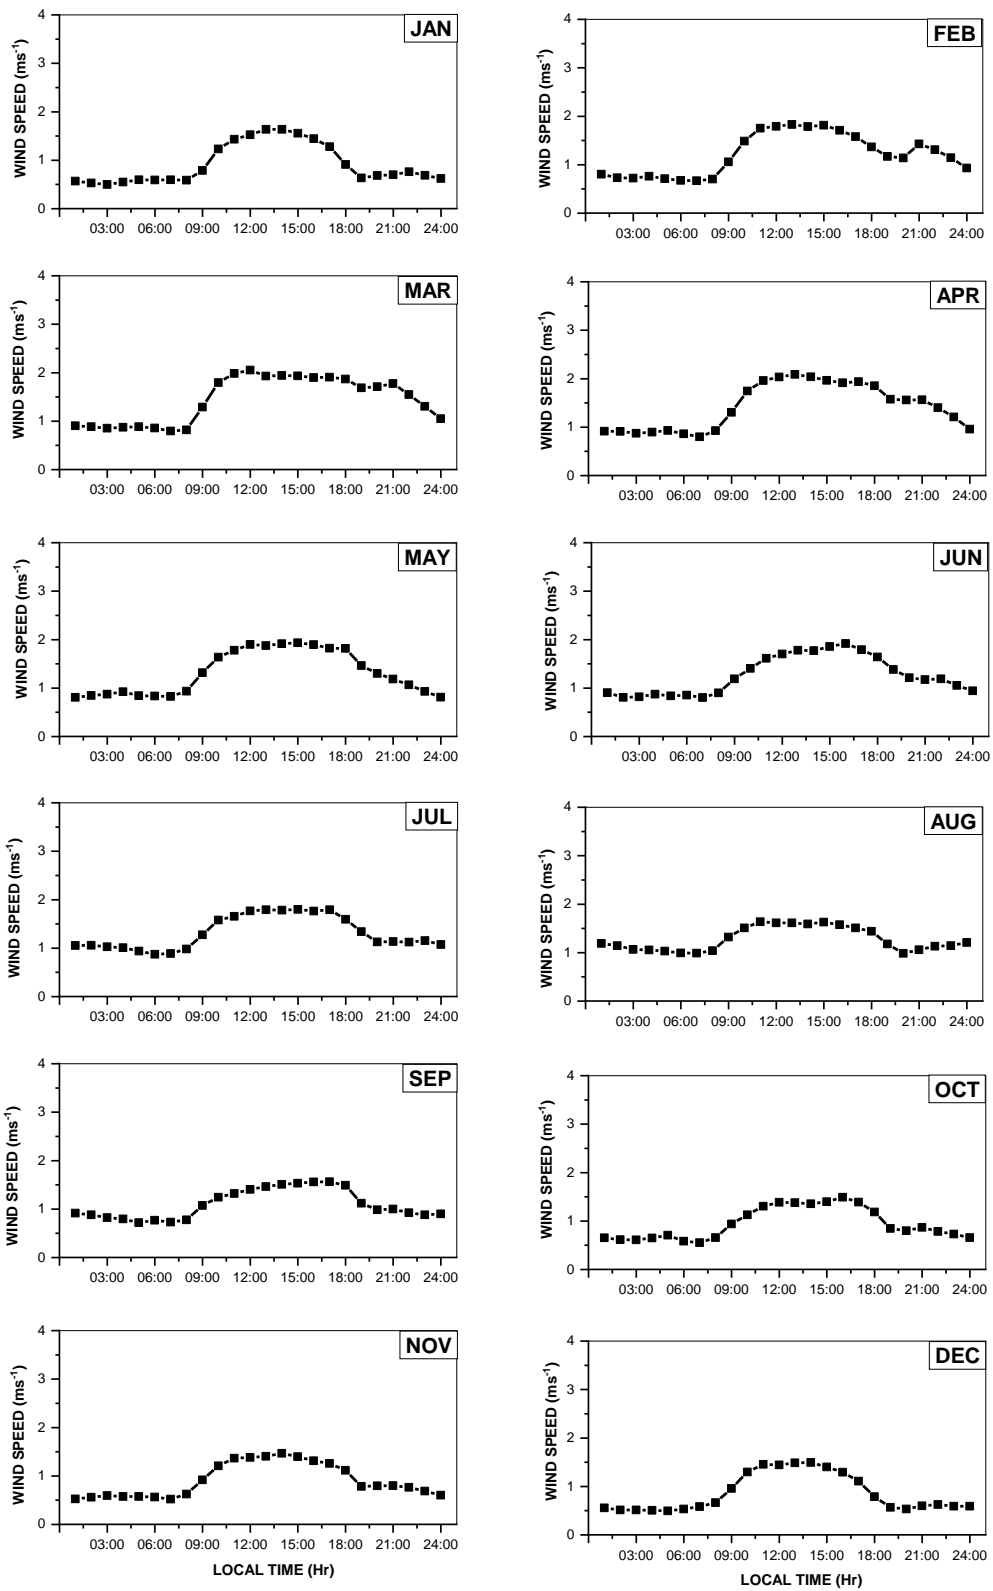


Fig. 4. Diurnal variation of monthly mean wind speed

09:00 LT onwards, Rh gradually decreased and reached minimum at about 15:00 LT. The observed minimum values are due to insolation during the daytime, hence, reduction in atmospheric moisture content. Afterwards, from about 20:00 LT, Rh progressively increased to reach maximum. The daily values of relative humidity (Rh) ranged between 29 % and 98 % with a mean value of 47 %.

In January, the daytime minimum value of Rh (Rh_{min}) at about 15:00 LT was observed to be 29 %. This was the lowest value of Rh_{min} recorded at the study location. This observation is an indication that in January, which is the peak of the 'Harmattan' period [15], the air is dry suggesting low moisture content. As the transition month approaches in March, Rh_{min} gradually increased from 49 % to 57 % in April; 63 % in May; 67 % in June; 73 % in July and 74 % in August. The increase in the values of Rh obtained is a consequence of increased rate of precipitation and high atmospheric moisture content that are prevalent about this time. From October, Rh_{min} steadily decreased from 61 % to 55 % in November; and drastically decrease to 33 % in December.

3.4 Diurnal Variation of Wind Speed

Fig. 4 shows the monthly hourly averages of wind speed (u) observed at the study location from January to December. Typically, the observed wind speeds were low (0.8 ms^{-1}) at about dawn and reached maxima (1.9 ms^{-1}) at noon and dropped off to near calm conditions around dusk. Generally, the values of wind speed observed during the study period were relatively low (about 2 ms^{-1}). This is typical of the wind speed distribution in the Tropics. The low wind speed values are as a result of the convergence of the trade winds (south-westerly and north-easterly) which generates weak horizontal pressure gradients at the surface.

4. SUMMARY AND CONCLUSION

In this study, six meteorological variables were observed from 2016 to 2019. The experiment was performed at the meteorological station (7.55°N ; 4.56°E) of Obafemi Awolowo University, Ile-Ife, Nigeria. The measurements of the meteorological parameters (incoming solar radiation, net radiation, air temperature, surface temperature, relative humidity and wind speed) were carried out on a 6-m micrometeorological mast centrally positioned at the station using

slow response sensors. The measurements were controlled by a programmable module CR10X datalogger. The raw data were reduced subsequently to 30-minutes average values.

The results obtained revealed that the maximum daytime monthly mean values of incoming solar radiation (S) and net radiation (Rn) were recorded in March (782.0 and 545.4 Wm^{-2} , respectively), which is the transition month from the dry to wet season. The minimum daytime monthly mean values of S and Rn were recorded in August (443.9 and 330.4 Wm^{-2} , respectively) which is cloudiest month of the year. The daily air and surface temperatures (T_a and T_s , respectively) varied between 16.4 and 37.8°C ; 17.7 and 49.7°C , respectively. The daytime maximum values peaked at about 15:00 LT with the maximum monthly mean values recorded in February (36.3 and 47.7°C , respectively) and the daytime minimum monthly mean values were recorded in August (28.9 and 33.3°C , respectively). The daily values of relative humidity (Rh) ranged between 29 % and 98 % with a mean value of 47 %. The diurnal trend of wind speed (u) recorded at the study location ranged between 0.48 ms^{-1} to 2.10 ms^{-1} .

ACKNOWLEDGEMENT

The author acknowledges the efforts of the members of Atmospheric Physics Research Group (APRG) at the Department of Physics and Engineering Physics of Obafemi Awolowo University, Ile-Ife, Nigeria during the field experiment.

COMPETING INTERESTS

Author has declared that no competing interests exist.

REFERENCES

1. Balasubramanian A. Measurement of meteorological variables. Technical Report; 2016. DOI: 1013140/RG.2.2.21633.66405.
2. Hubbard KG. Measurement systems for agricultural meteorology. Handbook of agricultural meteorology, Oxford University Press, New York and Oxford. 1994;76 – 81.
3. Parvez SH, saha JK, Hossain MJ, Hussain H, Ghuri MA, Chowdhury TA, et al. A Novel Design and Implementation of

- Electronic Weather Station and Weather Data Transmission System Using GSM Network. *Wseas transactions on circuits and systems*. 2016;15:21-34.
4. Akpootu DO and Aruna S. Diurnal and seasonal variations of global solar radiation in Akure, Ondo state, South Western Nigeria. *Int. J. Eng. Sci.* 2013; 2(12):80-89.
 5. Ayoola MA, Sunmonu LA, Bashiru MI and Jegede OO. Measurements of net all-wave radiation at a tropical location, Ile-Ife, Nigeria. *Atmósfera*. 2014;27(3):305-315.
 6. Augustine JA and Dutton EG. Variability of the surface radiation budget over the United States from 1996 through 2011 from high-quality measurements. *J. Geophys. Res.-Atmos.* 2013;118: 43-53.
 7. Soneye OO, Ayoola MA, Ajao IA and Jegede OO. Diurnal and seasonal variations of the incoming solar radiation flux at a tropical station, Ile-Ife, Nigeria. *Heliyon*; 2018. Available: <https://doi.org/10.1016/j.heliyon.2019.e01673>.
 8. Spiridonov V. Air Temperature. *Fundamentals of Meteorology*. 2021;73-86. DOI: 101007/978-3-030-52655-9_7.
 9. Jeevalakshmi D, Reddy S and Manikiam B. Land Surface Temperature Retrieval from LANDSAT data using Emissivity Estimation. *International Journal of Applied Engineering Research*. 2017;12(20):9679-9687.
 10. Mallick J, Kant Y and Bharath BD. Estimation of land surface temperature over Delhi using Landsat-7 ETM+. *J. Ind. Geophys. Union*. 2008;12(3):131-140.
 11. Farahani H, Wagiran R and Hamidon MN. Humidity sensors principle, mechanism and fabrication technologies: A comprehensive review. *Sensors*. 2014; 14(5):7881–7939. Available: <https://dx.doi.org/10.3390/s140507881>.
 12. Shelton DP. *Air Properties: Temperature and Relative Humidity*. NebGuide, University of Nebraska, Lincoln; 2008.
 13. Babatunde OA, Abiye OE, Sunmonu LA, Olufemi AP, Ayoola MA, Akinola OE and Ogolo EO. A comparative evaluation of four evapotranspiration models based on Eddy Covariance measurement over a grass covered surface in Ile-Ife, Southwestern Nigeria. *Model. Earth Syst. Environ*; 2017. DOI: 101007/s40808-017-0389-6.
 14. Obisesan OE. Estimation of Atmospheric Turbidity Parameters in Ile-Ife, Nigeria. *Physical Science International Journal*. 2021;25(7):30-40. DOI: 109734/PSIJ/2021/v25i730270.
 15. Obisesan OE. Aerosol Optical Depths during Two Harmattan Seasons in Ile-Ife, Nigeria. *International Journal of Environment and Climate Change*. 2021; 11(6):150-161; DOI:109734/IJECC/2021/v11i630431.

© 2022 Obisesan; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/89224>